

SPLIT **Com Pro**

Microphone Splitter / Combiner

Artcessories



User's Manual



IMPORTANT SAFETY INSTRUCTION – READ FIRST



This symbol, whenever it appears, alerts you to the presence of uninsulated dangerous voltage inside enclosure-voltage that may be sufficient to constitute risk of shock.



This symbol, whenever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.

Read Instructions: Retain safety and operating instructions for future reference. Heed all warnings printed here and on the equipment. Follow the operating instructions printed in this user guide.

Do not open: There are no user serviceable parts inside. Refer any service work to qualified technical personnel only.

Grounding: Only connect the unit to equipment with properly grounded mains power. Do not defeat the grounding and polarization means of the power cord plug of the connected equipment. Do not remove or tamper with the ground connection on the power cord of the connected equipment.

Environment: Protect from excessive dirt, dust, heat, and vibration when operating and storing. Avoid tobacco ash, drink spillage and smoke, especially that associated with smoke machines.

Handling: Protect the controls from damage during transit. Use adequate padding if you need to ship the unit. To avoid injury to yourself or damage to the equipment, take care when lifting, moving or carrying the unit.

Servicing: Refer servicing to qualified technical personnel.

Installation: Install the unit in accordance with the instructions printed in the user guide.

INTRODUCTION:

Thank you for purchasing Applied Research and Technology's SPLITComPRO. The ARTcessories SPLITComPro is an ideal audio utility to use in an application where you need to split a low impedance microphone signal to feed two separate mixers, or where it's necessary to combine balanced low impedance microphone signals from two microphones into a single channel input.



APPLICATIONS:

AS A SPLITTER: The SPLITComPro provides one direct-coupled output and one isolated output from a single microphone. Applications include sending the direct output to the main or FOH mixer, and the second isolated output to a monitor or recording mixer. The MAIN MIC OUTPUT passes phantom power from the main mixer to the MAIN MIC INPUT for use with condenser microphones. Phantom power is blocked from passing to the ISOLATED MIC OUTPUT.

AS A COMBINER: The SPLITComPro provides one output from two microphone inputs. The PHASE switch can be used to invert the relative phase of the ISOLATED MIC INPUT. Applications include dual miking of percussion instruments, choirs, and instrument amplifiers. Phantom power passes through each output to their respective input, (MAIN to MAIN, ISOLATED to ISOLATED), however phantom power is blocked from passing between the MAIN and ISOLATED signal paths. Only the audio passes between the MAIN and ISOLATED signal paths (it is present on all inputs and outputs).

The SPLITComPro includes a GROUND switch that, in the LIFT position, will provide full ground isolation between the MAIN MIC INPUT (& OUTPUT) and the ISOLATED MIC INPUT (& OUTPUT) to reduce noise

due to ground loops between connected AC-powered units.

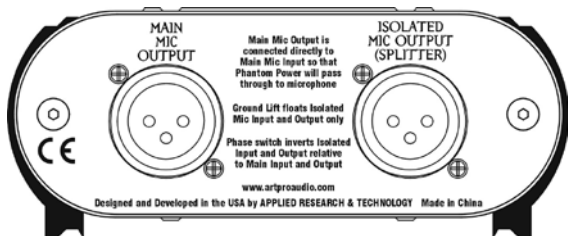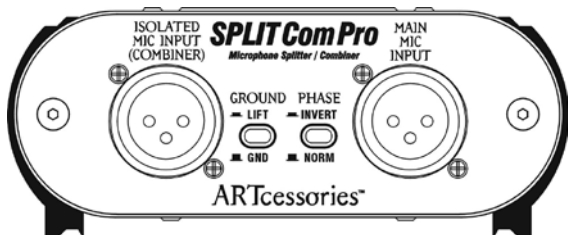

SPECIFICATIONS:

Frequency Response :	20Hz to 150kHz +/- 0.2 @ 0dBu
THD:	Less than 0.0007% from 20Hz to 20kHz at 0dBu input
Phase Shift:	Less than 10° at 20 to 150kHz (reference 1kHz)
Typical Driving Source Dist.:	150 Ohms
Typical Output load Impedance:	1k Ohms
Dimensions HxWxD(in):	1.85 x 4.6 x 3.5
Dimensions HxWxD(mm):	47 x 117 x 89
Weight (lbs/kg):	.75 / .32

Note: All of the measurements made from the *ISOLATED MIC OUTPUT* with *PHASE* switch out (*NORM*) and a 150 Ohm balanced source feeding the *MAIN MIC INPUT* and a 1k Ohm load connected to the *ISOLATED MIC OUTPUT* to simulate a typical "real world" microphone and mic preamplifier. 0dBu = 0.775VRMS

WARRANTY INFORMATION:

Limited Warranty (USA only)

Applied Research and Technology will provide warranty and service for this unit in accordance with the following warrants:

Applied Research and Technology, (ART) warrants to the original purchaser that this product and the components thereof will be free from defects in workmanship and materials for a period of **three** years from the date of purchase. Applied Research and Technology will, without charge, repair or replace, at its option, defective product or component parts upon prepaid delivery to the factory service department or authorized service center, accompanied by proof of purchase date in the form of a valid sales receipt.

Exclusions

This warranty does not apply in the event of misuse or abuse of the product or as a result of unauthorized alterations or repairs. This warranty is void if the serial number is altered, defaced, or removed.

ART reserves the right to make changes in design or make additions to or improvements upon this product without any obligation to install the same on products previously manufactured.

ART shall not be liable for any consequential damages, including without limitation damages resulting from loss of use. Some states do not allow limitations of incidental

or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific rights and you may have other rights, which vary, from state to state. The warranty terms listed above are only valid within the United States of America. For units purchased outside the United States, an authorized distributor of Applied Research and Technology will provide service. For information on warranty and service policies outside of the U.S., please contact your local distributor.

Please fill in the following information for your reference:

Date of purchase: _____

Purchased from: _____

SERVICE:

The following information is provided in the unlikely event that your unit requires service.

1. Be sure that the unit is the cause of the problem. Check to make sure that the unit has power supplied, that all cables are connected correctly, and that the cables themselves are in working condition. You may want to consult with your dealer for assistance in troubleshooting or testing your particular configuration.
2. If you believe that the ART unit is at fault, go to www.artproaudio.com. Select "Support", then "Return Authorization Request" to request a return authorization number.
3. If you are returning the unit for service, pack the unit in its original carton or a reasonable substitute. The original packaging may not be suitable as a shipping carton, so consider putting the packaged unit in another box for shipping. Print the RA number clearly on the outside of the shipping box. Print your return shipping address on the outside of the box.
4. Include with your unit: a note with the RA number and your contact information, including a return shipping address (we cannot ship to a P.O. box) and a daytime phone number, and a description of the problem, preferably attached to the top of the unit. Also include a copy of your purchase receipt.



www.artproaudio.com

E-mail: support@artproaudio.com

© 2014 Applied Research & Technology

SplitComPro

SCP-5004-101

V1.1